

Easy Solar Kit

All Sceneries **Transformer**

TSOL-ESK400-T / TSOL-ESK800-T



DIY Installation

Built-in WiFi, APP Remote Monitoring

Highly Waterproof

Output Power 400W/800W
Can be Adjusted According to
Local Regulations

Wind & Snow Prevention

Angle Adjustable for More
Power Generation

Plug & Play


TSUNESS Co., Ltd
sales@tsun-ess.com www.tsun-ess.com +86-512-66186028

Technical Data


Model	TSOL-ESK400-T	TSOL-ESK800-T
PV Module Parameter *		
Reconmended Module Power(Wp)	300 - 700+	
Length of Solar Module (mm)	>900	
Width of Solar Module (mm)	>500 ; < 1150	
Thickness of Solar Module (mm)	30	
AC Output Parameter		
Max. System Continous Output Power (W)**	400	800
Max. Output Current (A)	2	4
Nominal Output Voltage (V)***	220/230/240	
Nominal Frequency (Hz)***	50/60	
Power Factor	>0.99	
Output Current Harmonic Distortion	<3%	
Length of AC End Cable***	5m (10m, 15m optional)	
Certification		
Solar Module	CE,TUV,UL,CQC,IEC 61215,IEC 61730	
Microinverter	CE-LVD,CE-EMC,CE-RED,VDE 4105,EN 50549-1	
Bracket	EN 10204:2017, EN 1090-1:2009+A1: 2011	
Environmental Parameter		
Environmental Protection Rating	IP67	
Operating Ambient Temperature Range	-25 °C to 65 °C	
Relative Humidity	0-100%	
Max. Operating Altitude Without Derating [m]	2000	
Mechanical Parameter		
Weight [kg]	12	24
Package Dimensions (W×H×D mm)	885×360×108	885×360×150
Warranty	12 years	

* The colour , brand and power of the solar module can be customized if the PV module is compatible to ESK system.
** The output power of the system can be limited to according to local regulations.
*** The AC voltage , frequency range and plug type may vary depending on specific country grid.

Standard Configuration

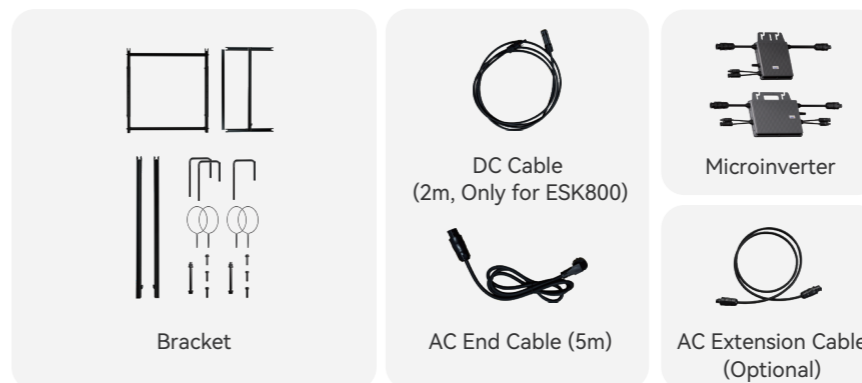

System Digran

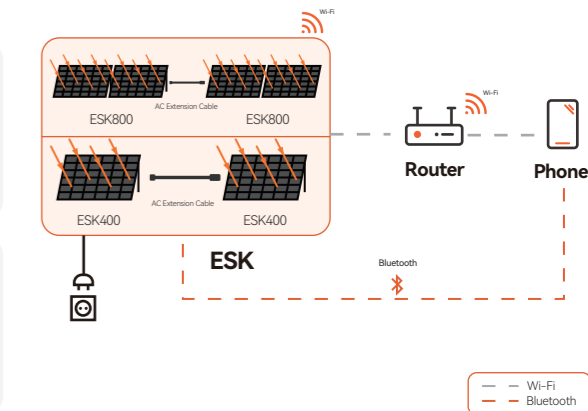

For more information , visit / contact us at www.tsun-ess.com

© 2024 TSUNESS . All rights reserved. All specifications are subject to change without prior notice.